



## Jumpax® Classic: A Fast-Track Acoustic Floor Prep Solution

A product of

**uniFloor**  
UNDERLAY SYSTEMS USA


- Exceptionally stable
- Provides a super smooth finish
- Applicable for all glue-down resilient and carpets tiles
- Excellent sound reduction up to 22 dB  $\Delta L_w$ .
- Thermal insulation rating of TOG - 1.6



Jumpax® Classic is an acoustic, fast-track floor prep system designed for all glue-down resilient flooring, including sheet vinyl, LVT (luxury vinyl tile), linoleum, carpet, and carpet tiles. This product can be installed over nearly any type of floor construction and is ideal for home use.

With its two self-adhesive layers, Jumpax® Classic installs quickly and easily as a floating subfloor. It smooths over typical floor irregularities, eliminating the need for primers, plywood boards, and nails. There's no need to remove old flooring, or to worry about surface contamination. Using Jumpax® Classic reduces the risk of floor failure due to problem substrates, minor cracks, or laitance. Additionally, this system minimizes the risk of damaging pipes or cables beneath the floor.

The installation can be easily removed without causing any damage to the original floor, if needed. For best results, place a polyethylene sheet underneath the product as a moisture barrier.

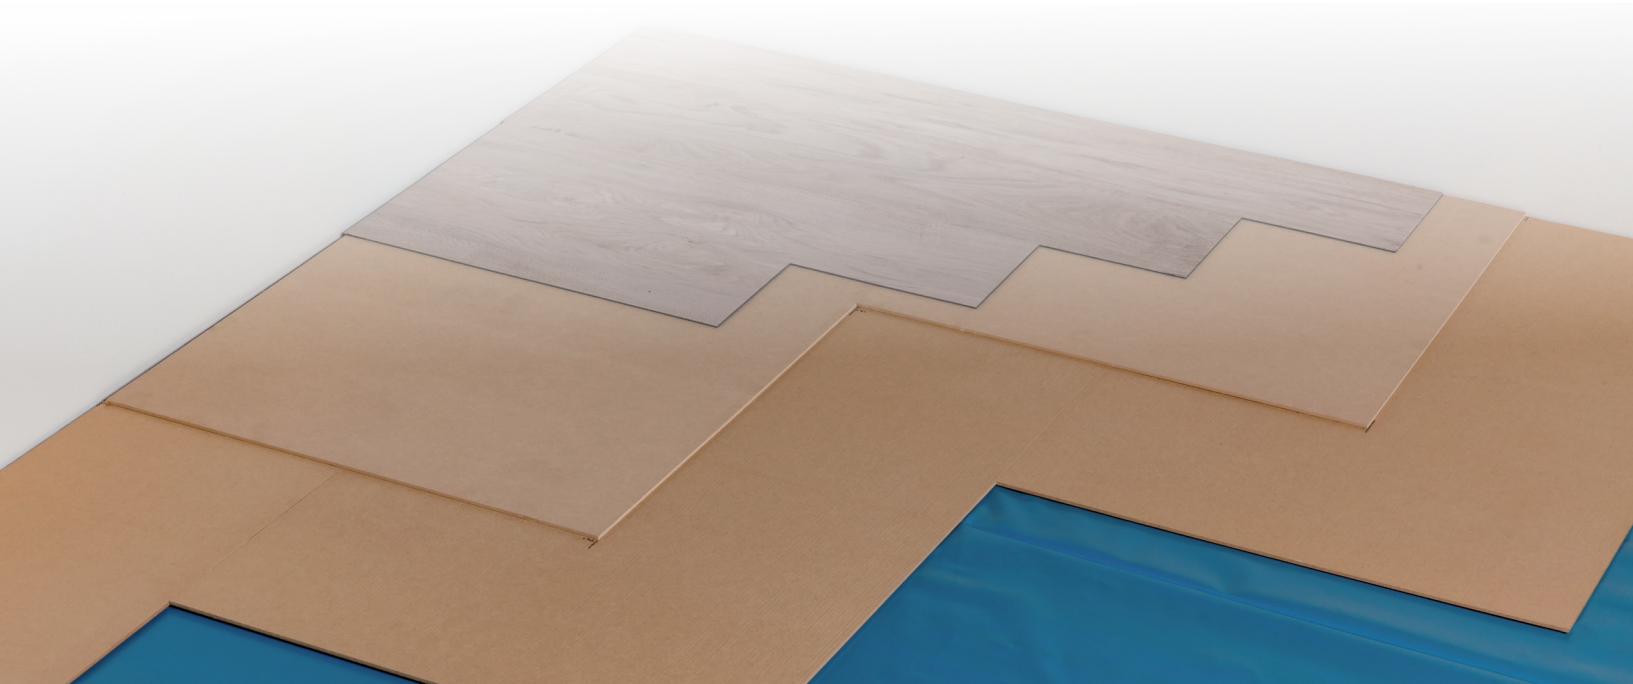

## Product information

### TECHNICAL DATA

Article number	136.000
Thickness/tolerance	0.39" / $\pm 0.008$ "
Size	23.62" x 47.24"
Raw material(s) combinations	MDF/Polystyrene alufilm
Colour	Natural/silver

Weight per sq" (lb)	12.13
Weight per package (lb)	35.27
Density (lb/cubic inch)	0.02
Humidity (%)	4-10
Swelling after 24 hours in water, max (%)	< 40

#### Fire class

(according to EN13501: 2007)

#### Nude test

with 0.078" LVT measured from the top  
with 0.078" Linoleum measured from the top

$D_{fl-s1}$   
 $B_{fl-s1}$   
 $C_{fl-s1}$

#### Thermal resistance

TOG

1.6

#### Compressive strength (kPa)

(according to EN 826 with 0.5 mm imprint)

100

#### Load test

(according to DIN-EN-1991-1-1)

Class E1, E2 and E3

#### Sound insulation based on $R_w = 53$ dB

(according to ISO 717-1-2013)

#### Nude test

$R_w = 55$  dB  
(+ 2 dB reduction)

#### Impact sound reduction on concrete floor

(according to ISO 10140-3 2010)

in combination with linoleum 0.078"

in combination with LVT 0.078"

in combination with LVT click 0.16"

in combination with Cushion vinyl 0.12"

21 dB  $\Delta L_w$   
21 dB  $\Delta L_w$   
21 dB  $\Delta L_w$   
22 dB  $\Delta L_w$

#### Impact sound reduction on wooden floor

(according to ISO 10140-3 2010 base from 64 dB)

#### Nude test

5 dB  $\Delta L_n$

#### VOC (Volatile Organic Compounds)

Formaldehyde degree

FSC certified

EPD certified

Class A  
E-1  
FSC C154437  
EPD-Unifloor-257-EN

### PACKAGING

- 4 base- and 4 topboards
- 23.62" x 47.24"
- 31 sq ft

Installation instructions present

Pallet contents 48 packs / 1488 sq ft

Pallet size (lxwxh) 47.24" x 47.24" x 44.5"

Pallet weight 1741.65 lbs

### APPLICATION

Acoustic, fast track subfloor for glue-down of all resilient, carpet and carpet tiles for domestic use.



Scan the QR code for more info about Jumpax<sup>®</sup> Classic!

Visit [www.unifloor-usa.com](http://www.unifloor-usa.com) for the most up-to-date information.

#### Unifloor U.S.A.

1500 Donn Drive  
Cartersville, GA 30120



#### Derek Kellermann

Country manager  
770 722 1680

[info@unifloor-usa.com](mailto:info@unifloor-usa.com)  
[www.unifloor-usa.com](http://www.unifloor-usa.com)