



Acoustic, fast track floor prep system for resilient floor coverings in heavy project use

- Exceptionally stable
- Provides a super smooth finish
- Ready for glue-down of all resilients, carpets and carpet tiles
- Suitable for direct gluing on laminated wood
- Excellent sound reduction of 22 dB ΔL_w
- TOG - 1.2

Jumpax® HD (Heavy Duty) is specifically designed for projects that demand top-tier performance and exceptional subfloor stability. It's ideal for direct glue-down installations of engineered wood flooring.


Jumpax® HD is a floating, fast-track subfloor preparation system that's perfect for glue-down resilient flooring, including vinyl, luxury vinyl tile (LVT), linoleum, cork, rubber, as well as carpet and carpet tiles. Thanks to its outstanding stability, Jumpax® HD also works seamlessly with engineered wood, providing a smooth, stable surface for direct adhesion. It's compatible with almost any type of floor construction and can be installed over floor heating systems.

The unique composition of Jumpax® HD offers excellent resistance to both dynamic and static loads.

This system consists of two self-adhesive layers that are quick and easy to install as a floating subfloor, instantly smoothing out common surface irregularities. It eliminates the need for screeds, primers, plywood, or nails, making it a hassle-free solution. With Jumpax® HD, common issues like problem substrates, minor cracks, or laitance are no longer a concern. Plus, the system helps prevent damage to pipes and cables within the floor, saving both time and money.

Jumpax® HD also provides an impressive 21 dB ΔL_w impact sound reduction when used with LVT or linoleum on a concrete subfloor with an attached screed.*

Important: Always use a polyethylene sheet underneath the product as a moisture barrier.

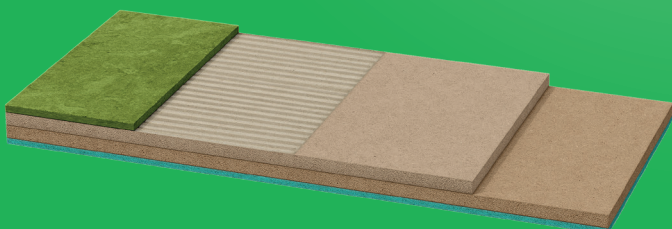

For us at Unifloor, the use of FSC® certified wood is very important. Environmentally and social appropriate use of the forest means that the forest's productivity, biodiversity and ecological processes are maintained while harvesting the wood. By using FSC wood, we are helping to promote responsible forest management. Therefore Unifloor solely uses raw materials from FSC certified sources.

unifloor
UNDERLAY SYSTEMS USA

PRODUCT SPECIFICATIONS



TECHNICAL DATA

Article number	150.000
Thickness/tolerance	0.39"/ ± 0.008"
Size (cm)/tolerance (mm)	23.62" x 47.24"
Raw material(s) combinations	MDF/PE-Foam
Colour	Natural/green
Weight per package (lbs)	40,79
Humidity (%)	4-10
Swelling after 24 hours in water, max (%)	< 40
Fire class	
(according to EN13501: 2007)	
Nude test	D _{fl-s1}
With 2mm LVT measured from the top	B _{fl-s1}
Thermal resistance	
TOG	1.2
Compressive strength (kPa)	
(according to EN 826 with 0.5 mm imprint)	355
Castor chair	
(according to EN 425 2002)	Pass
Load test	
(according to DIN-EN-1991-1-1)	Class E1, E2 and E3
Sound insulation based on R _w = 53 dB	
(according to ISO 717-1-2013)	
Nude test	R _w = 55 dB
	(+ 2 dB reduction)
Impact sound reduction on concrete floor	
(according to ISO 10140-3 2010)	
in combination with linoleum 2 mm	21 dB ΔL _w
in combination with LVT 2.8 mm	21 dB ΔL _w
in combination with LVT 2.5 mm	23 dB ΔL _w
in combination with LVT 2.0 mm	22 dB ΔL _w
Impact sound reduction on wooden floor	
(according to ISO 10140-3 2010 base from 64 dB)	
Nude test	5 dB ΔL _n
in combination with 30 mm Ecopearls	12 dB ΔL _n
VOC (Volatile Organic Compounds)	Class A
Formaldehyde degree	E-1
FSC certified	FSC C154437
EPD certified	EPD-Unifloor-258-EN

APPLICATION

Acoustic, fast track subfloor for glue-down of all resilient, engineered wood and carpets in heavy project use.

PACK CONTENTS

4/4

- 4 base- and 4 topboards
- 23.62" x 47.24"
- 31 sq ft
- Thickness 0.39"

PACKAGING

Installation instructions included	
Pallet contents	48 packs / 1487sq ft
Pallet size (lwxh)	47.24" x 47.24" x 44.49"
Pallet weight	2017,24 lbs



Scan the QR code
for more info
about
Jumpax® HD!

Visit www.unifloor-usa.com for
the most up-to-date information.